



WHY CHOOSE THE iFlex RackGuard?

Protecting racking in your workplace is vital. Choosing the right sort of protection is equally important, and we have launched the new iFlex RackGuard which is the best rack leg protector that you can buy. It performs.


A scientific design that brings with it a host of unique benefits, if you have racking, you need the RackGuard.

Side impact absorption.

If struck from the side, the impact energy is absorbed and the guard then reforms to its original shape.

Front impact absorption.


When hit from the front the guard reduces the impact and transfers the energy around the rack leg rather than through it, reducing damage.



Front impact absorption.



BMW parts warehouse - (Northampton UK).

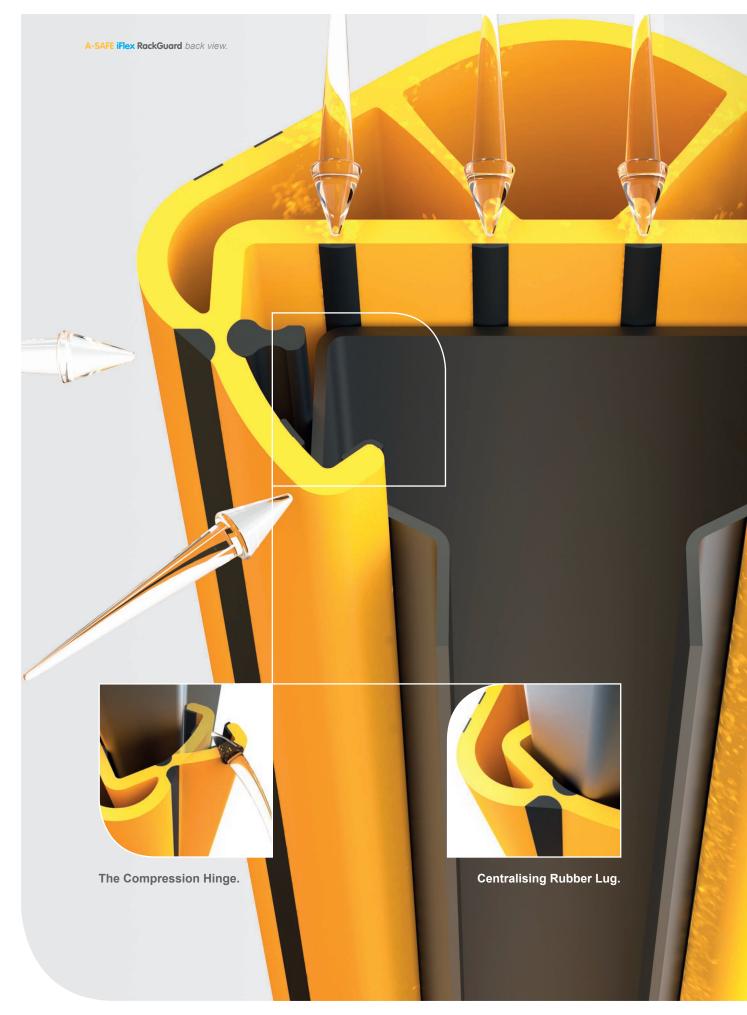



The Compression Hinge.

This unique feature ensures that the leg is in a constant state of compression and grips securely around the racking leg.

Centralising Rubber Lug.

A distinctive benefit, specially designed to ensure the RackGuard fits central to any sized rack leg.

Built-in Memory.


Made from our exclusive material, **Memaplex**, this strong and flexible product allows it to return to its original shape after impact time and time again.

Various leg lengths & sizes.

Whatever your rack leg size, our RackGuard will fit.

Ten Frictional Grip Points.

For an improved overall grip to any rack leg.



Built-in Memory.



New warehouse installation.




To find out more, contact sales +44 (0) 1422 331133, get in touch at sales@asafe.co.uk or visit www.asafe.co.uk





TESTED TO THE MAXIMUM



Finite Element Analysis (FEA) is a computer based method of analysing the behaviour of engineering structures and components under a variety of controlled conditions.

The iFlex RackGuard has undergone rigorous testing.

After spending hundreds of hours on FEA testing, we made the prototype on which to perform physical tests.


For the physical test, we mounted the RackGuard to a medium duty steel racking upright. We perform a front impact drop test where 100kg weight is dropped from one meter height resulting in a velocity of 9.8m/s. This generates a force of 1000 newtons, equivalent to a 2 tonne vehicle travelling at 3.6kmph.

Additional tests showed zero deflection on the racking after five front impacts of 400 newtons, giving you five times the safety factor.

The iFlex RackGuard also comes to you with independent approval that guarantees your peace of mind. It is TÜV certified to EN 15 512 standard. It has also achieved the protection outlined in the FEM 10.2.02 standard, and the AS 4084 (Australia) standard. TÜV also approve our in-house testing apparatus.



Prodinger Packaging - (Germany).

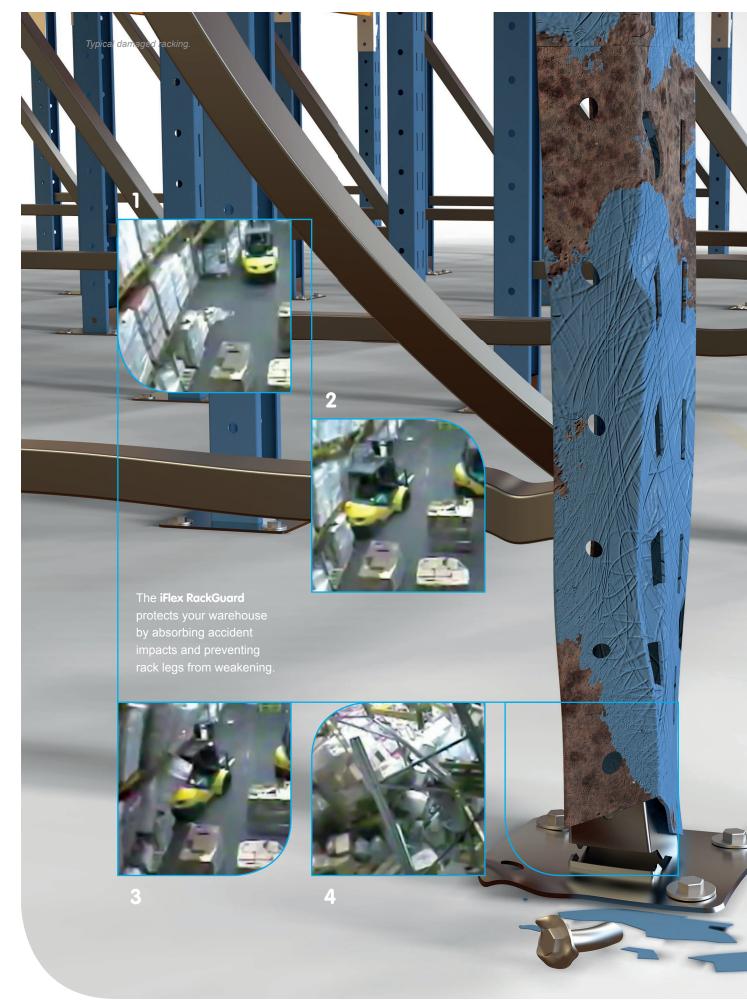



MAINTAINING HIGHER STANDARDS

Did you know that, under current codes of practice:

- The maximum amount of front deflection allowed on a rack leg is 3mm.
- The maximum amount of side deflection allowed on a rack leg is 5mm

It is also common sense that, where racking is likely to be struck by lift trucks and other vehicles, it should be protected. Generally, such damage is at the lower levels of the racking – and governing bodies all over the world recommend:

- Using renewable column guards to minimise the risk of damage from accidental impact.
- Corner uprights in a run of racking should be suitably provided with a protective device in a conspicuous colour as they are particularly high-risk.

The iFlex RackGuard has been tested to ensure that you're protected against forbidden levels of deflection, and is independently tested and certified to EN 15 512 and FEM 10.2.02, and achieves the protection outlined in the AS 4084 (Australia) standard.




Schneider Electronics new warehouse full installation - (France).

iFlex RackGuard


MEMAPLEX®


 The iFlex RackGuard is available in a range of sizes, made from Memaplex and comes with unique hinged legs – allowing them to fix securely to any type of racking system.





m

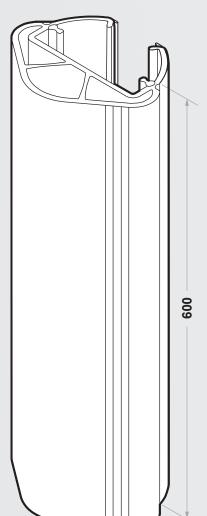

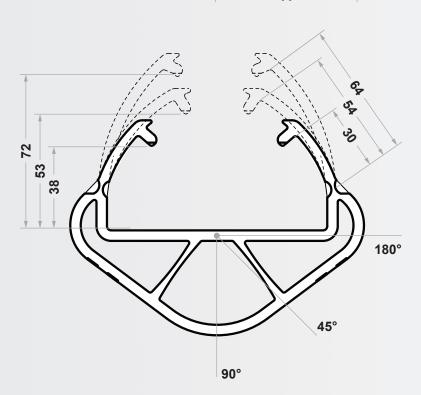





Material Properties

material repetites			
Temperature	MEMAPLEX"	<u>+</u> Û-	-15°C to +50°C
Temperature	MEMAPLEX [®]	<u>+</u> 0-	-40°C to +30°C
Chemical Res	istance	$oxedsymbol{\mathbb{Z}}$	Excellent - ISO / TR 10358
Fire Rating		M	HB / F
Food Contact		٣ 9	Yes
Toxicity		❸	None
Conductivity		4	No
Environment			
CO ₂ / m			3.57
Recyclability		5	100%

Terms and conditions apply. Standard Warranty 2 years.

Optional Extras





Internal Rubber Grips




RackGuard Tool Set



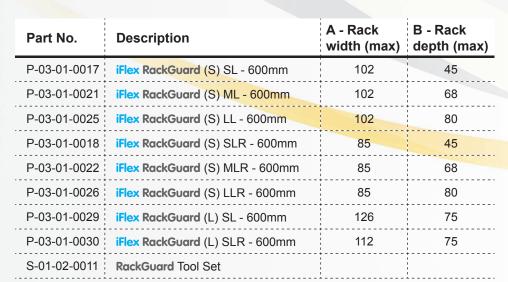





P-03-01-0017 P-03-01-0021 P-03-01-0025



P-03-01-0018 P-03-01-0022 P-03-01-0026



P-03-01-0029



P-03-01-0030





Habergham Works, Ainleys Industrial Estate, Elland, Halifax HX5 9JP **Sales**: +44 (0) 1422 331133 **Enquiries**: +44 (0) 1422 344402 **F**: +44 (0) 1422 323533

E: sales@asafe.com w: www.asafe.com

