



# A-SAFE

Est. 1984

## eFlex™ ForkGuard™ Kerb Barrier



Designed to provide ground level protection for walls, buildings and equipment.

The eFlex ForkGuard deflects vehicle forks in shallow angle or low-force impacts. It also acts as a pallet stop or buffer preventing stored goods encroaching into pedestrian areas or walkways.


Floor mounted and bolted from above, the eFlex ForkGuard integrates with A-SAFE barriers when installed together.




Code of Practice  
for Workplace  
Safety Barriers

**PAS13**  
2017

# Engineered for performance

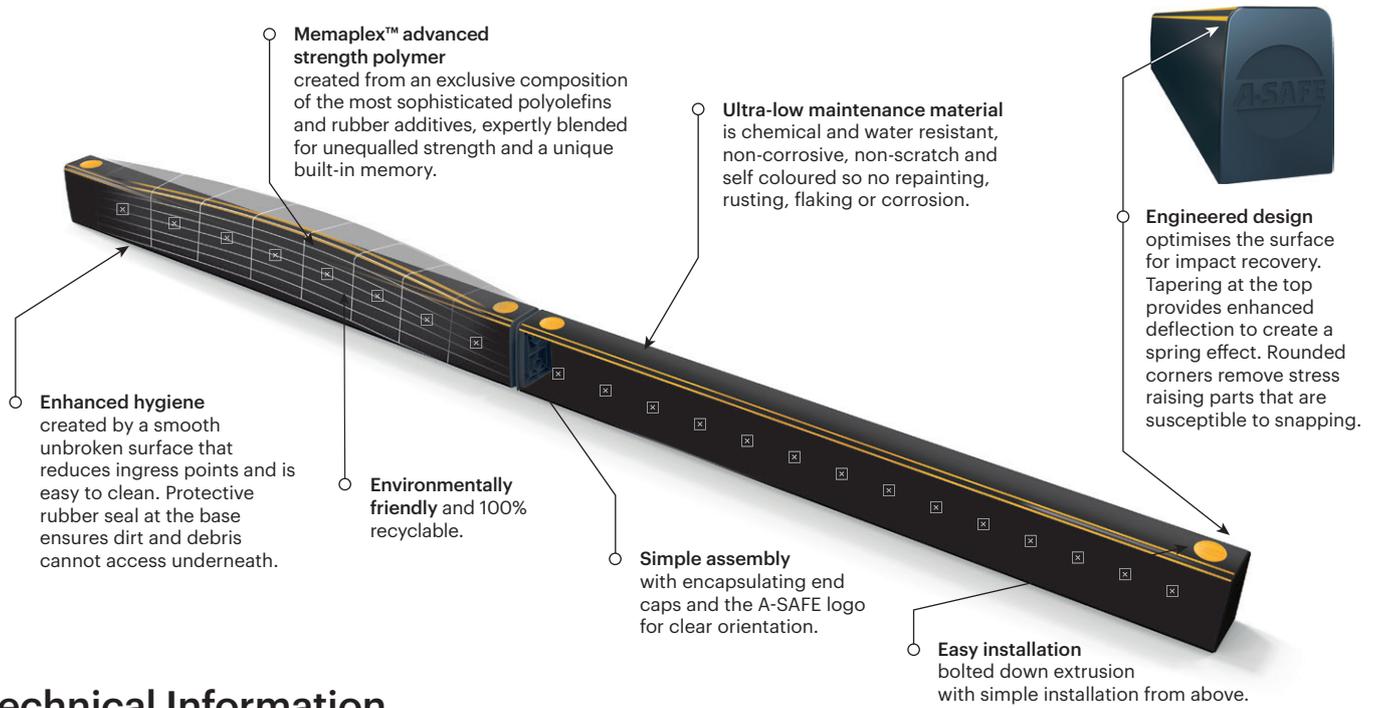


## Technical Information

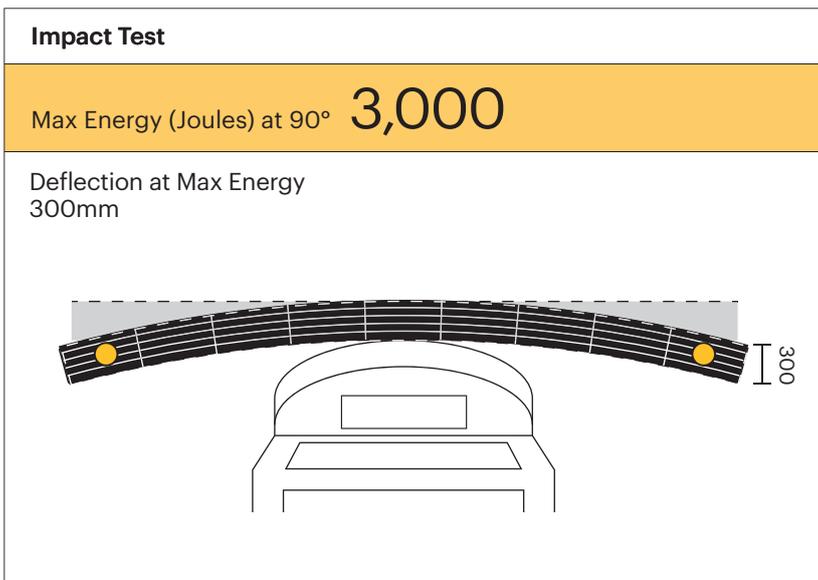

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	No

\* Weathering scale 1 is very poor and 5 is excellent  
 \*\* Light stability scale 1 is very poor and 8 is excellent

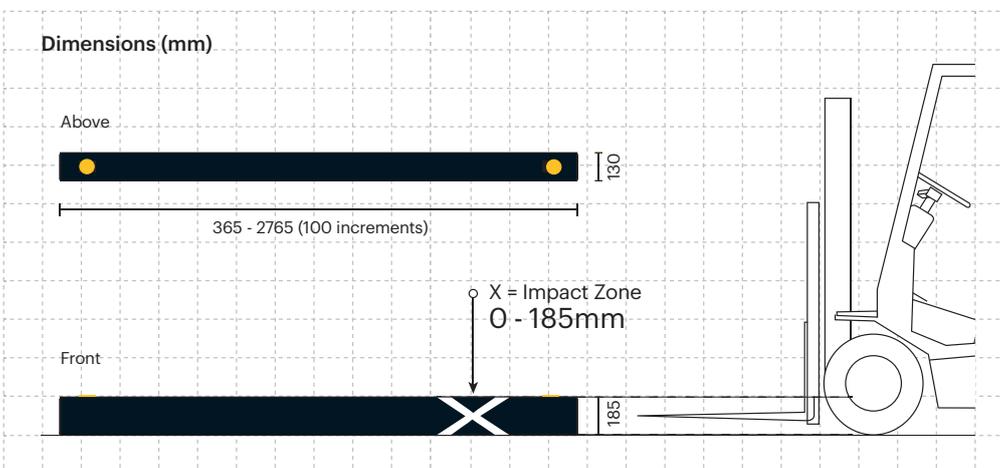

### Colour Combinations



\*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.

### A-SAFE Headquarters

Habergham Works, Ainleys Industrial Estate, Elland, HX5 9JP, West Yorkshire, United Kingdom.  
[www.asafe.com](http://www.asafe.com)

