


Technical Information

How the energy from a vehicle impact is calculated

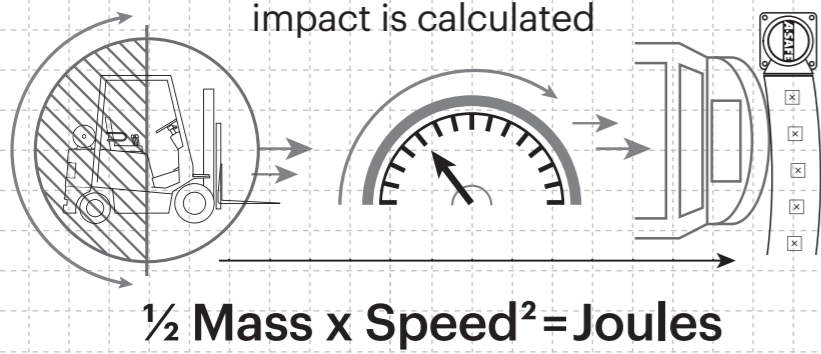

Tested Impact Energy
8,200 Joules
 Equivalent vehicle and speed

3.2 tonne X **5 mph impact**

Mid Rail 45° Impact on 1500mm Post Centres


Impact Test	Impact Angle on 1500mm Post Centres			
	90°	45°	22.5°	10°
Mid Rail Max Energy (Joules)	5,800	8,200	15,150	33,400
End Post Max Energy (Joules) - 90°	3,700			
Mid Post Max Energy (Joules) - 90°	2,700			

Deflection at Max Energy 320mm

Force to Bolt 9kN

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	Yes


* Weathering scale 1 is very poor and 5 is excellent
 ** Light stability scale 1 is very poor and 8 is excellent

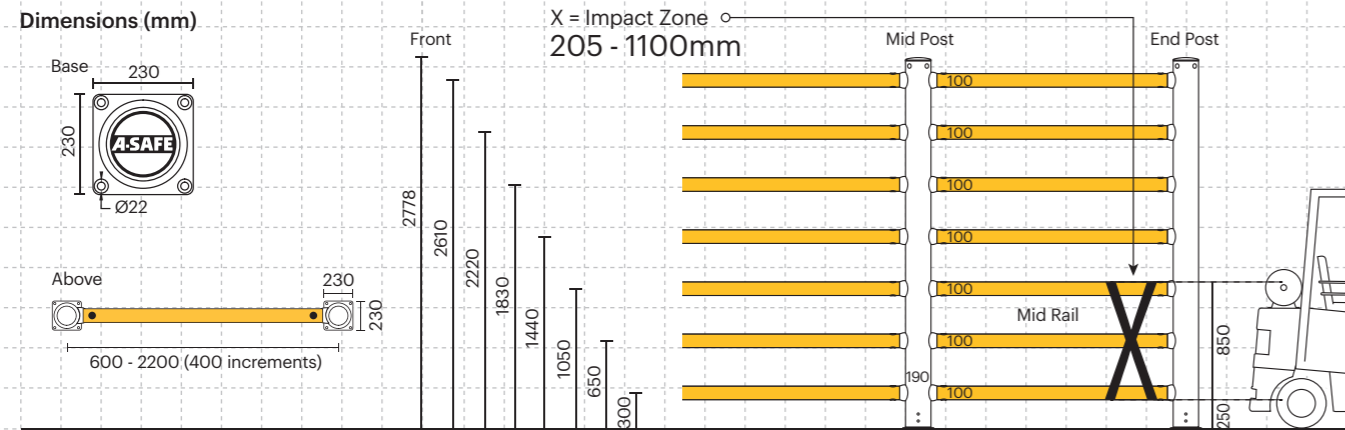

Post Options



Rail Options

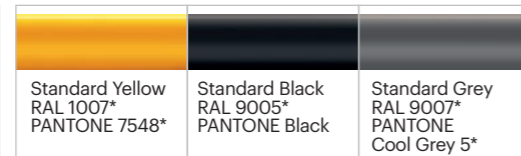

Colour Combinations


*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.



High Level Pedestrian Barrier 7 Rail

A-SAFE


Est. 1984

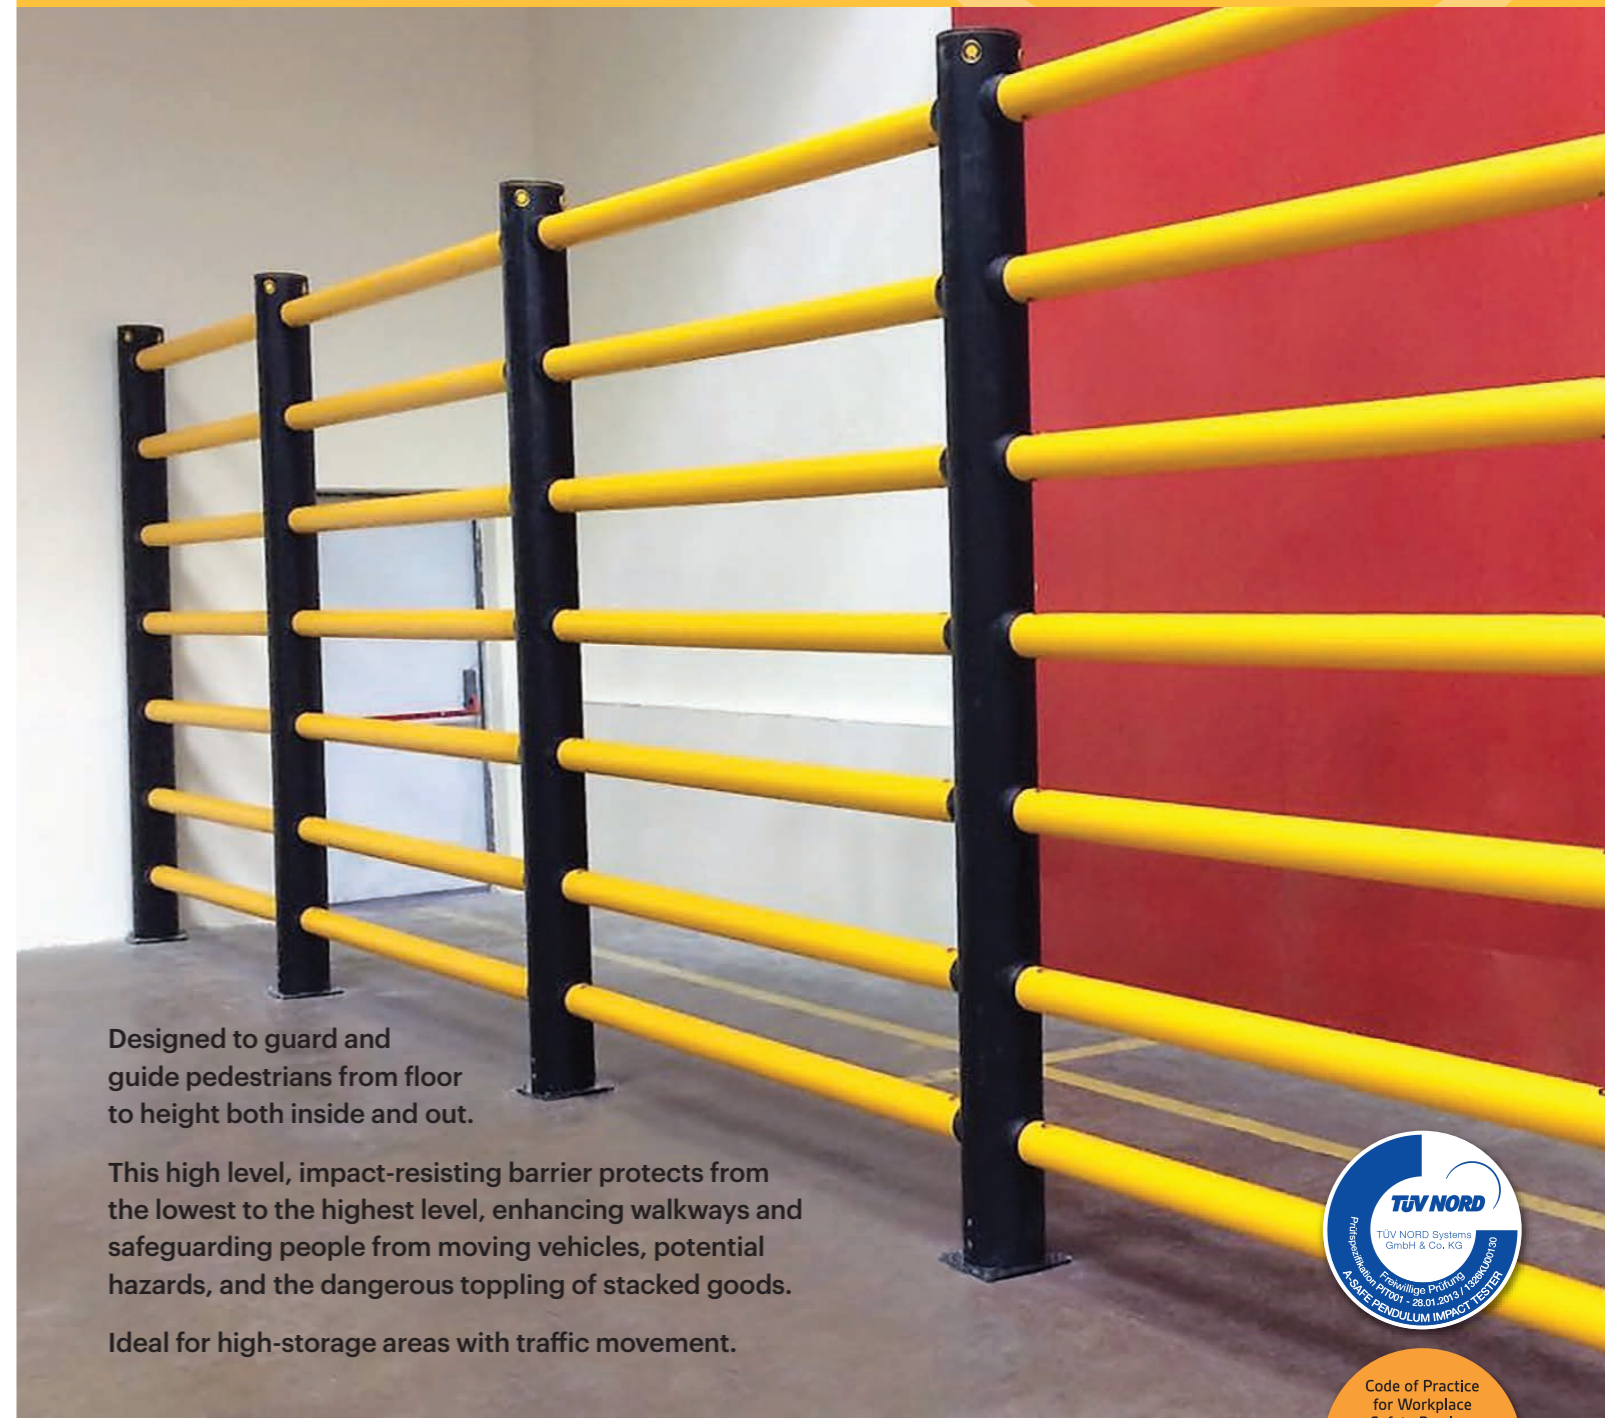

Designed to guard and guide pedestrians from floor to height both inside and out.

This high level, impact-resisting barrier protects from the lowest to the highest level, enhancing walkways and safeguarding people from moving vehicles, potential hazards, and the dangerous toppling of stacked goods.

Ideal for high-storage areas with traffic movement.



Engineered for performance

A-SAFE's state of the art products are meticulously engineered to deliver the highest performance. Designed, developed, tested and manufactured in-house at our cutting-edge facility, each unique component is carefully crafted and purpose-built to play a vital role in the product's performance.

Advanced strength polymer created from an exclusive composition of the most sophisticated polyolefins and rubber additives, expertly blended for unequalled strength and flexibility.

Unrivalled recovery through a unique built-in memory that allows the barrier to flex, cushion and reform repeatedly upon impact, saving vast amounts in barrier and vehicle repairs.

Huge return on investment from incident prevention and downtime avoidance as barriers, vehicles, floors and equipment do not need replacing or repair.

Topple protection from increased height prevents accident and injury in stacked storage zones.

Ultra-low maintenance material is chemical and water resistant, non-corrosive, non-scratch and self coloured so no repainting, rusting, flaking or corrosion.

Exclusive modularity allows rails and posts to be replaced in-situ without removing adjacent barrier sections.

Multi-directional system ensures a streamlined fit into any facility and the removal of hard angles.

Hygiene seals remove ingress points.

Ergonomic design with no sharp edges.

Food safe, wipe-clean, water resistant surface.

Zinc nickel, electrophoretic coating on base plates as standard, provides advanced protection against corrosion damage.

ADDITIONAL BASE OPTIONS

Countersunk Bolts Creates a flat surface, preventing tyre damage where vehicles are in close proximity.	Galvanised Steel Increased weather resistance for outdoor use and harsh climate environments.	Stainless Steel 316 Standard Ultimate performance option, no corrosion or rusting and resistant to powerful cleaning agents. Ideal for hygiene environments.	Stainless Steel 316 Countersunk

Energy Absorption System
Patented system dissipates impact forces through the barrier and away from floors and fixings, preventing costly damage.


No floor damage 80% of impact force is absorbed, transferring just 20% to the floor.

Environmentally friendly and 100% recyclable.

Self coloured and UV stabilised for continued visibility and long lasting aesthetics with no repainting.


MEMAPLEX™

Patented Engineering
Molecular reorientation during manufacturing creates a unique built-in memory that enables the barrier to fully recover following impacts.

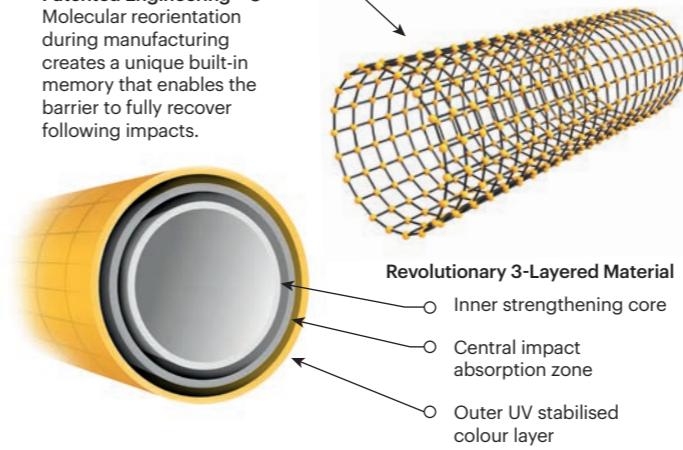


Energy Absorption System


A patented 3-phase system that activates sequentially for unparalleled energy absorption

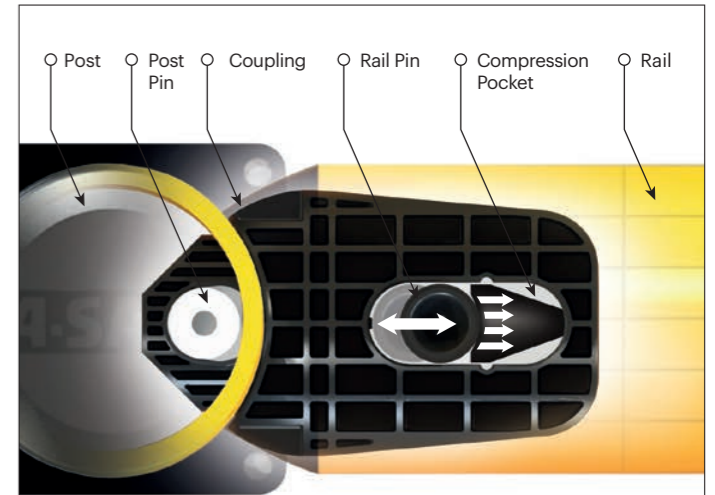

PHASE 1: Memaplex™ rail flexes to absorb impact, initiating the rail pin to slide forward and transfer load energy to the compression pocket.

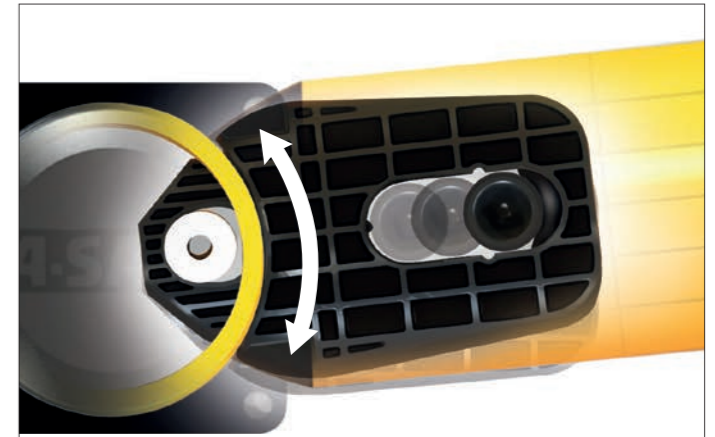

PHASE 2: Compression of the pocket continues to disperse energy as the coupling rotates around the post pin to activate further absorption.

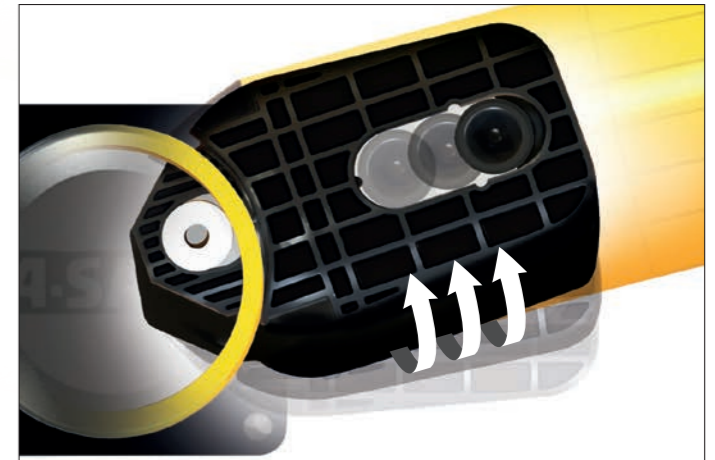

PHASE 3: At peak energy, the coupling twists further, engaging the post pin and instigating torsion of the post to dispel remaining forces.